



The ABC's of Trailers and Hitches

www. ppp.purdue.edu



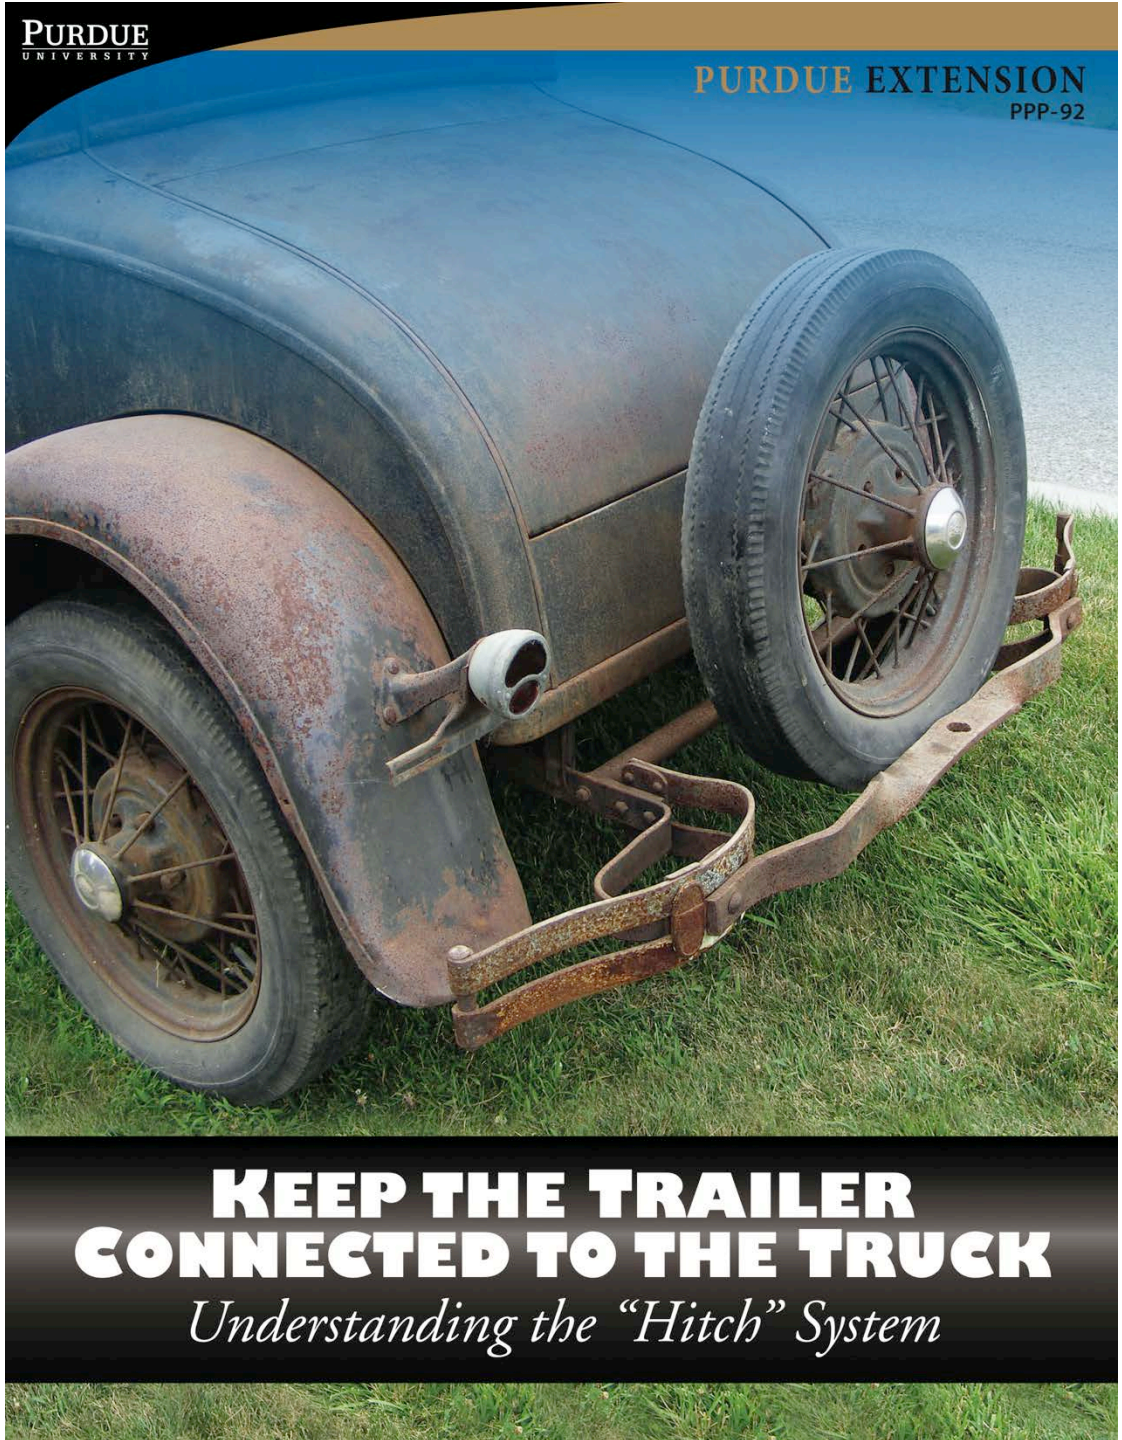




OAK RIDGE FIRE DEPT.
OAK RIDGE


OAK RIDGE
R. COLE
OAK RIDGE





Farmer charged with manslaughter after trailer killed two motorcyclists

By Kristine Goodrich kgoodrich@mankatofreepress.com Aug 23, 2019




2
12

- Ford Ranger series: 2,000 to 5,800 pounds
- F 150 series: 2,000 to 8,800 pounds
- F 250 series: 7,000 to 14,000 pounds
- F 350 series: 7,000 to 14,000 pounds
- F 450 series: 14,000 to 18,000 pounds








6860
HITCH TYPE
MAXIMUM TRAILER WEIGHT (LBS/KG)
MAXIMUM TONGUE WEIGHT (LBS/KG)
WEIGHT CARRYING
WEIGHT DISTRIBUTING
5000/2270
12000/5440
600/270
1500/680
TOW VEHICLE MAXIMUM TRAILER RATING MAY BE LESS. SEE OWNERS MANUAL FOR MAXIMUM TRAILER RATING AND ADDITIONAL INFORMATION.


Hitch Ratings
V-5 TALON
Capacités de remorquage
Hitch Type
Type d'attelage
Maximum Trailer Weight
Poids maximal de remorque
Maximum Tongue Weight
Poids maximal au timon
Weight Carrying
Porteur de charge
5 000 lb (2 268 kg)
600 lb (272 kg)
Weight Distributing
Répartiteur de charge
12 000 lb (5 443 kg)
1 500 lb (680 kg)
Tow vehicle maximum trailer rating may be less.
La capacité de remorquage maximale du véhicule remorqueur peut être inférieure.
15083472
Printed in USA
2355269 S2

25843936 Hitch Ratings/Capacités de remorquage


V-5 GM

Hitch Type Type d'attelage	Maximum Trailer Weight Poids maximal de remorque	Maximum Tongue Weight Poids maximal au timon
Weight Carrying Porteur de charge	13 000 lb (5 897 kg)	1 500 lb (680 kg)
Weight Distributing Répartiteur de charge	13 000 lb (5 897 kg)	1 500 lb (680 kg)

Tow vehicle maximum trailer rating may be less.

La capacité de remorquage maximale du véhicule remorqueur peut être inférieure.

20903608

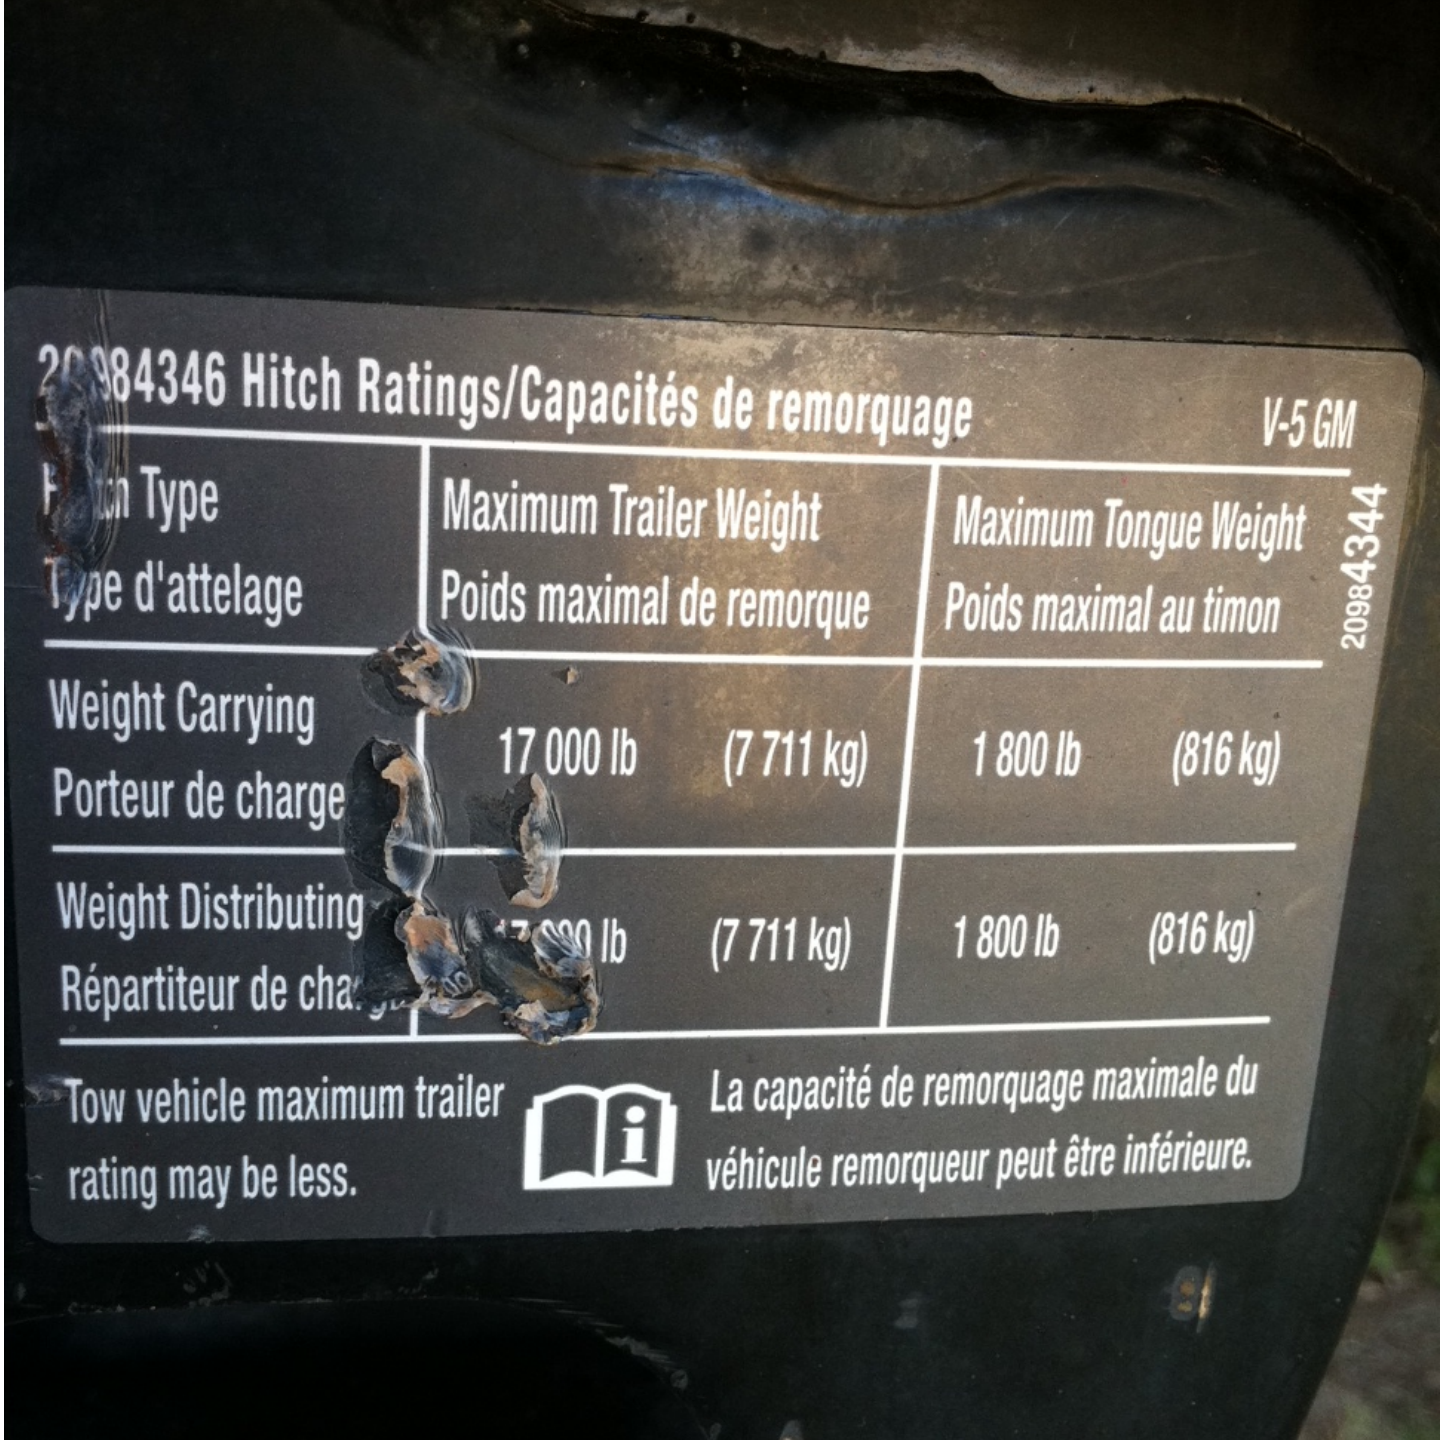
20984346 Hitch Ratings/Capacités de remorquage
V-5 GM
Hitch Type
Type d'attelage
Maximum Trailer Weight
Poids maximal de remorque
Maximum Tongue Weight
Poids maximal au timon
20984344
Weight Carrying
Porteur de charge
17 000 lb (7 711 kg)
1 800 lb (816 kg)
Weight Distributing
Répartiteur de charge
(7 711 kg)
1 800 lb (816 kg)
Tow vehicle maximum trailer rating may be less.
La capacité de remorquage maximale du véhicule remorqueur peut être inférieure.



Truck Towing Rating 9,000




Rhino Linings









Truck towing rating 9,000

Receiver 7,500




CURT
XTRA DUTY
Max Trailer Wt.
Poids de remorque
Peso del remolque
15,000 lbs.
Max Tongue Wt.
Poids vertical
Peso vertical
1,500 lbs.
Do not overload any part of your towing system at any time.
Ne surchargez jamais une partie de votre système de remorquage.
Nunca sobrecargue ninguna parte de su sistema de arrastre.
www.curtmfg.com
Made in China
Fabriqué en Chine
Hecho en China
V-5
80363

BALL MOUNT
LOAD RATING
Max Load 3,500 lbs
Tongue Wt. 350 lbs
DO NOT
exceed tow capacity
of hitch or vehicle












REESE
2
5000 LB






2"
5000LB


CTP
2
A16G
6000LB

BPC
2"
C11 6
10000 LB






Truck Towing rating 9,000

Receiver 7,500

Insert 10,000

Ball 6,000

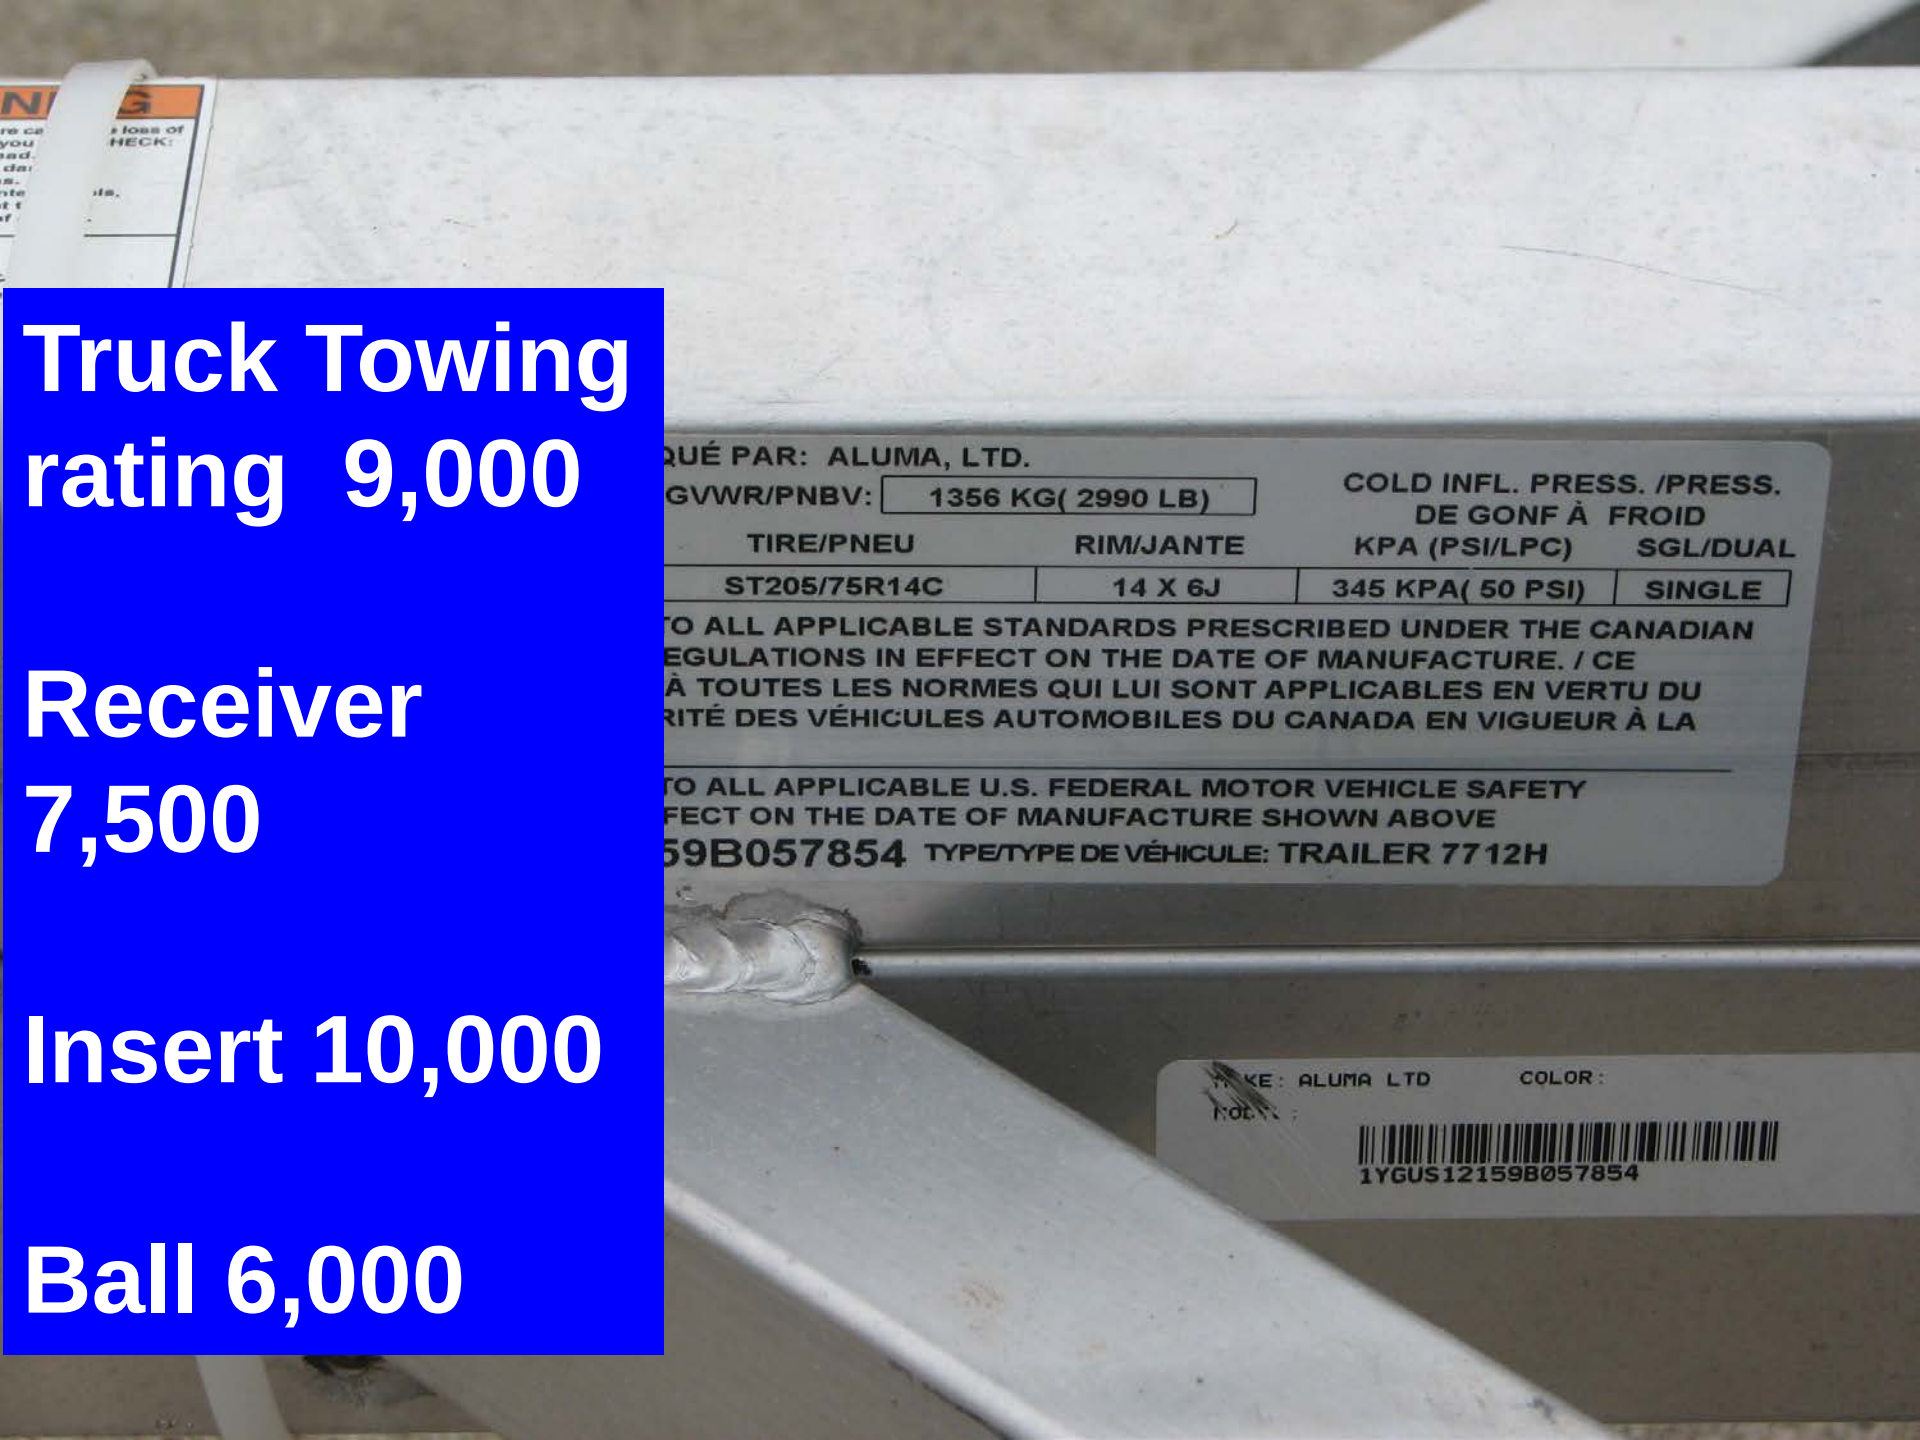
Truck Towing rating 9,000
Receiver 7,500
Insert 10,000
Ball 6,000
QUÉ PAR: ALUMA, LTD.
GVWR/PNBV: 1356 KG(2990 LB)
COLD INFL. PRESS. /PRESS. DE GONF À FROID
TIRE/PNEU
RIM/JANTE
KPA (PSI/LPC)
SGL/DUAL
ST205/75R14C
14 X 6J
345 KPA(50 PSI)
SINGLE
TO ALL APPLICABLE STANDARDS PRESCRIBED UNDER THE CANADIAN
EGULATIONS IN EFFECT ON THE DATE OF MANUFACTURE. / CE
À TOUTES LES NORMES QUI LUI SONT APPLICABLES EN VERTU DU
RITÉ DES VÉHICULES AUTOMOBILES DU CANADA EN VIGUEUR À LA
TO ALL APPLICABLE U.S. FEDERAL MOTOR VEHICLE SAFETY
FECT ON THE DATE OF MANUFACTURE SHOWN ABOVE
59B057854 TYPE/TYPE DE VÉHICULE: TRAILER 7712H
KE: ALUMA LTD
COLOR:
1YGUS12159B057854


AG0002607106
MFG. BY
C & C TRAILERS, INC.
DATE 11-98
GVWR 14300
14300
TIRES 235/8
GAWR ALL AXLES 6084
WHEELS 16X
THIS VEHICLE CONFORMS TO ALL APPLICABLE
SAFETY STANDARDS IN EFFECT ON THE DATE O
VIN 1C9WG2029X
TYPE TRAILER
JOB NO.
Truck Towing rating 9,000
Receiver 7,500
Insert 10,000
Ball 6,000












Rhodes
101
CONVENIENCE STORES

VA TRUCK P
TX 39-61
HOV






PRIMO
PRIMO










Dominion
REESE







SUBURBAN
804-233-8228
GRNLWN1
TRAILERS


NOT FOR CLIMBING


2" Ball
REQUIRED

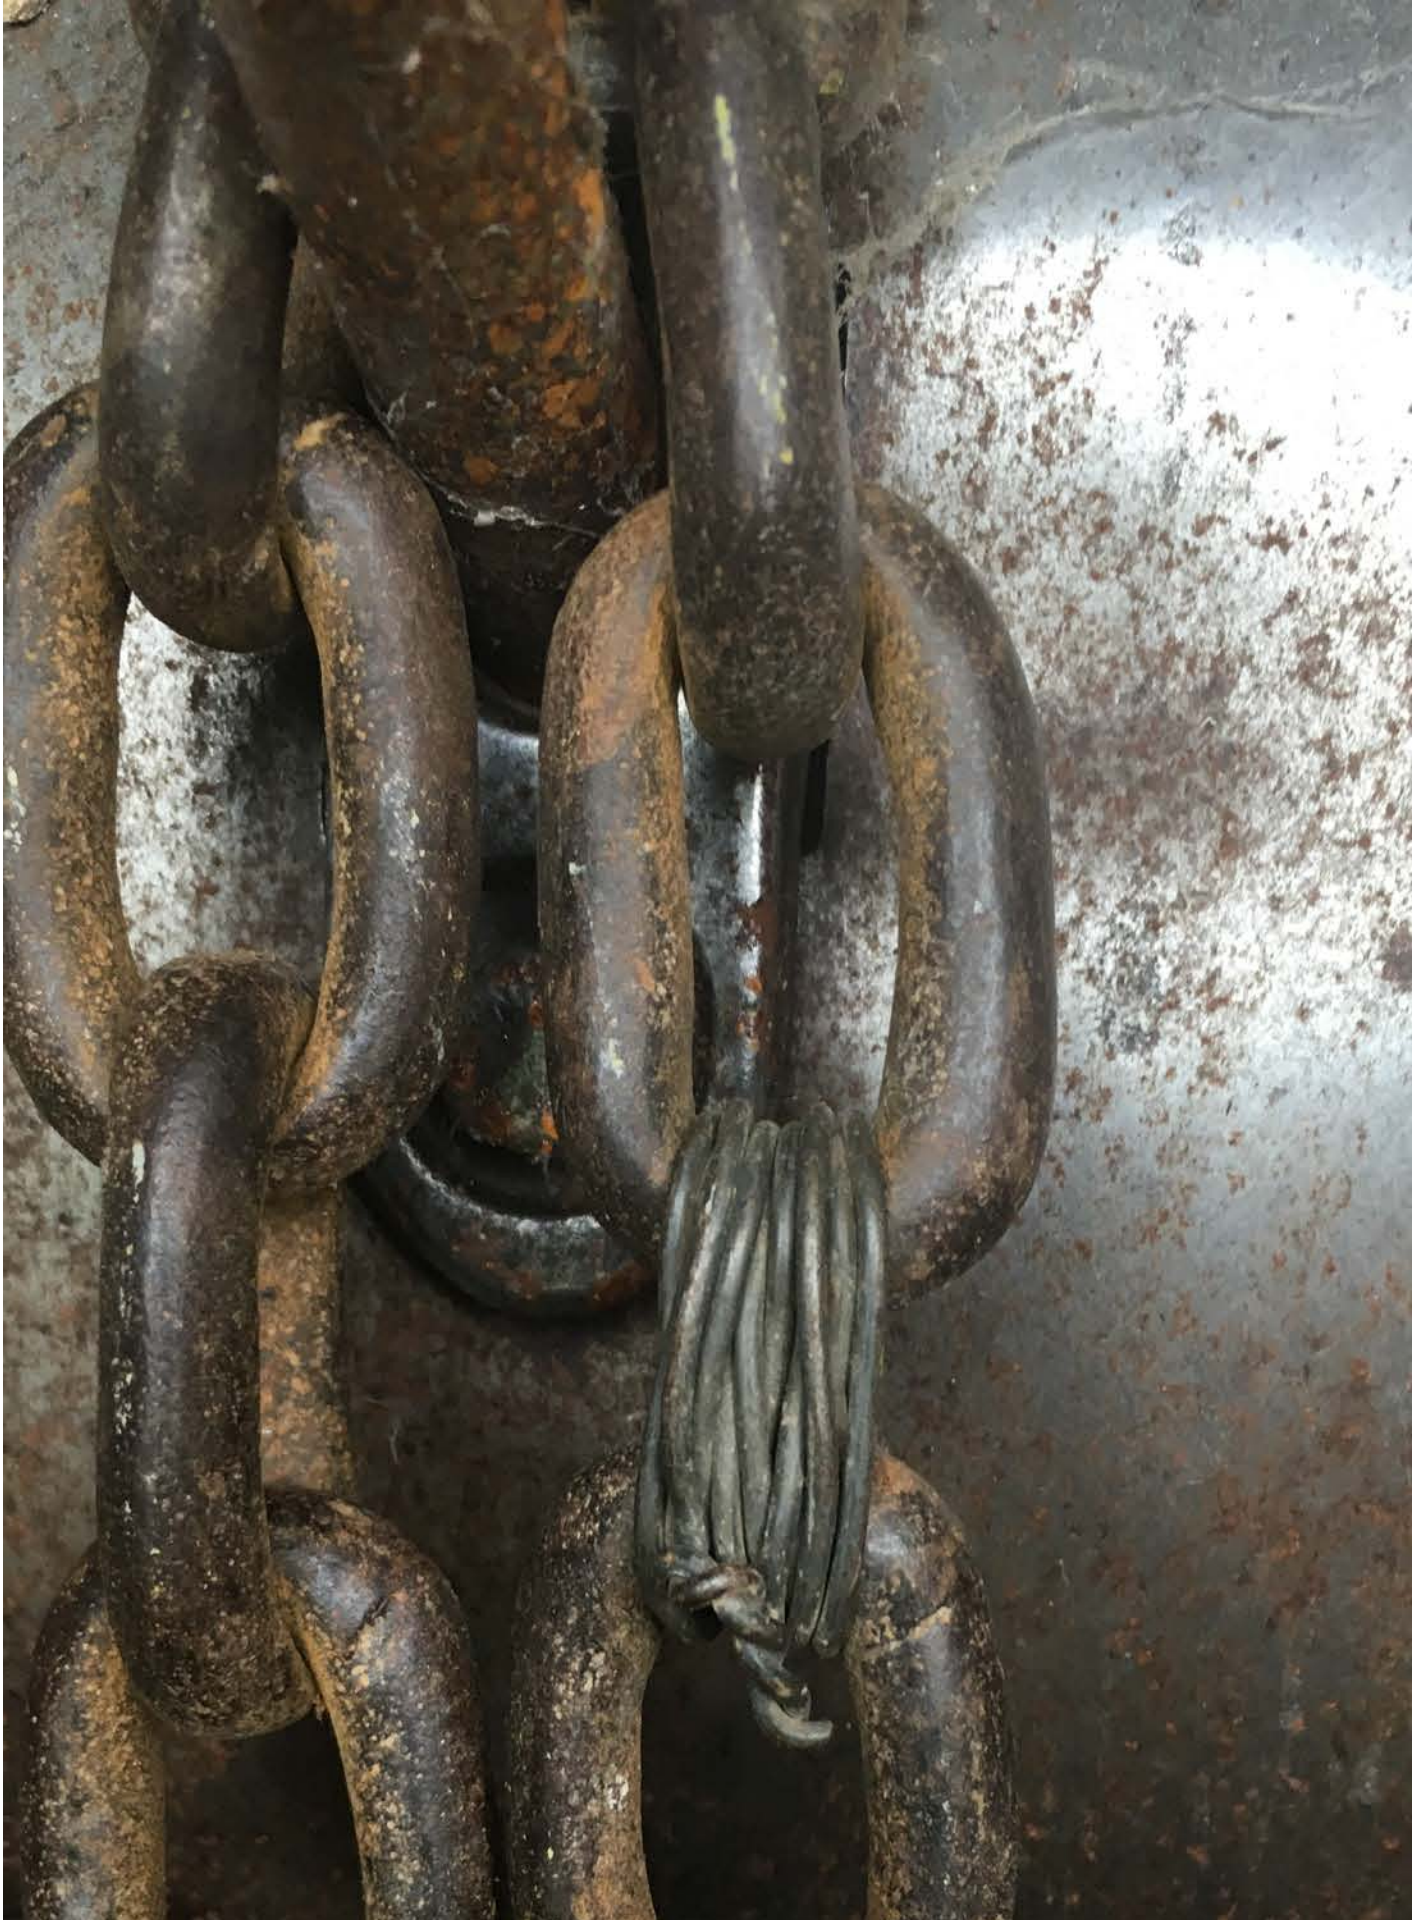


3
T/M EXPIRES
12
VIRGINIA SAFETY APPROVAL


McPeek's DODGE


G3 / G70




TEKONSHA
ENGINEERING CO.
TEKONSHA, MICH. 49092
6 & 12 VOLT D.C.
BREAKAWAY SWITCH
MODEL 2010















BALL
3,500

INSERT
5,000

RECEIVER
7,500

TRUCK
12,400

TRAILER

GVWR	EMPTY WEIGHT	USABLE PAYLOAD
7,000	2,400	4,600



TRAILER

GVWR	EMPTY WEIGHT	USABLE PAYLOAD
7,000	2,400	4,600





BALL
3,500



INSERT
5,000



RECEIVER
7,500



TRUCK
12,400



www.ppp.purdue.edu